

Adjustable fixture | 90° pivot at the socket and rotates 360° | Open fixture rated low voltage MR16 or AR70 lamp up to 50 watts (not included)

# Micro Spot E

**Ordering Code:** MIE - [ ] - [ ] - [ ] - [ ]

**Fixture**  
MIE  
Micro Spot E Stem Suspended

**System**

CA4	CA6	TR4	TR6	BTC	BTW	LT	NS
4" Cable	6" Cable	4" Twin Rail	6" Twin Rail	Basis Ceiling	Basis Wall (Max. 16")	Liana	No System Connector

**Overall Length**

ST	6" - 72"
5.25" Standard Length	Specify Length

**Lamping**

AR70	MR16
50w Max.	50w Max.

**Metal Finish**

AL	PN	RB
Satin Aluminum	Polished Nickel	Rubbed Bronze



**Compatible Accessories** (not compatible with AR70 option):  
Single lens clip, single and double accessory holders, back shield, snoot, barn doors, glass lens, louver, filter. See accessory ordering guide page 213 column TSA-03.

LOW VOLTAGE FIXTURES & PENDANTS  
FIXTURES

Adjustable fixture with 24kt gold plated brass socket pins 90° pivot at the socket | Open fixture rated low voltage MR16 lamp up to 50 watts (not included)

# Euro

**Ordering Code:** EUR - [ ] - [ ]


**Fixture**  
EUR  
Euro

**System**

CA4	CA6	BTC
4" Cable	6" Cable	Basis Ceiling

**Metal Finish**

AL	PN	RB
Satin Aluminum	Polished Nickel	Rubbed Bronze

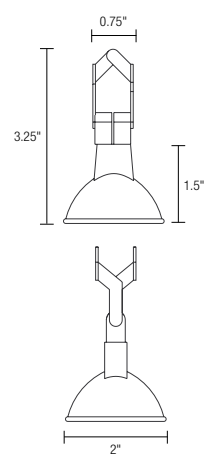

**Compatible Accessories:**  
Single lens clip, single and double accessory holders, back shield, snoot, barn doors, glass lens, louver, filter. See accessory ordering guide page 213 column TSA-03.