

Transjack

All Translite Sonoma low voltage fixtures and pendants are represented by an approximate overall length in the ordering code. Overall length is measured from the bottom of the track or monopoint to the bottom of the fixture or pendant. To calculate the exact distance from the bottom of the track to the bottom of the fixture, add the measurement of the system connector to the length of the fixture (not required for monopoints).



Basis System Connector



Basis Wall System Connector
(16" max cantilever)



Liana System Connector




Cable System Connector



Twin Rail System Connector

Ordering Code:



System

CA4 4" Cable System Connector	CA6 6" Cable System Connector	TR4 4" Twin Rail System Connector	TR6 6" Twin Rail System Connector
BT Basis System Connector	BTW Basis Wall System Connector	LT Liana System Connector	

Metal Finish

AL Aluminum	PN Polished Nickel	RB Rubbed Bronze
-----------------------	------------------------------	----------------------------

Transjack System Connectors


Transjack is a universal connector that allows Translite Sonoma fixtures to be used interchangeably among our low voltage systems. Transjack system connector may be ordered with the fixture or separately.

- To order a fixture with a Transjack system connector, simply include the track system as part of the fixture ordering code. The Transjack system connector will be included with the fixture.
- To order a standalone fixture without a system connector, specify "NS" as your system option.

System Connector Measurement:

Basis & Basis Wall	Cable & Twin Rail	Liana	NS
0.38"	0.63"	0.94"	0"

Ordering Code:




Metal Finish

AL Aluminum	PN Polished Nickel	RB Rubbed Bronze
-----------------------	------------------------------	----------------------------


Transjack Universal Pendant Connector (TJ-UNV)

The connector allows virtually any pendant to be mounted to a Translite Sonoma low voltage system. It is field adjustable and connects to our monopoint canopies and track systems (system connector ordered separately).

- Accepts both two wire and coaxial style cords
- Maximum weight for pendants: 5lbs.



Ordering Code:




Metal Finish


AL Aluminum	PN Polished Nickel	RB Rubbed Bronze
-----------------------	------------------------------	----------------------------

Transjack Sloped Ceiling Adapter (TJ-CA)

- Adjusts fixture drop from 0-90 degrees for sloped ceiling applications.
- Lockable stem rotates 360 degrees.

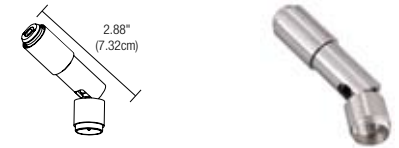

Ordering Code:



Overall Length

6" - 16"
Specify Length

Metal Finish

AL Aluminum	PN Polished Nickel	RB Rubbed Bronze
-----------------------	------------------------------	----------------------------

Transjack Sconce Adapter (TJ-SA)

- Provides an additional 90 degree articulation for pivoting fixtures.
- Lockable stem rotates 360 degrees.

